

Catalyst Element

Catalyst Video Wall Processor



Catalyst Element is the compact member of the Catalyst line and is ideal for small to medium-sized video wall installations such as control rooms, government command centers, surveillance rooms, and utility centers. The Catalyst Element delivers the best-in-class solution for essential and critical control rooms as it can display any amount or type of data required to enhance operations.

- Enterprise grade Xeon processors
- Windows 10
- Up to 16 IP streams
- Up to 4 4K inputs
- Web/VNC/Application support
- HDCP compliant
- Standalone or Canvas Enterprise
- Compatible with PANA 21:9, 5K displays
- Compatible with LCD, LED, cubes and projectors display technologies
- Up to 8 outputs



4

Supports up to 4 4K direct inputs




More 4K IP and direct inputs, more memory, and more power for unparalleled bandwidth speed



Decode up to 16 H.264 streams

Architecture of a Catalyst Installation

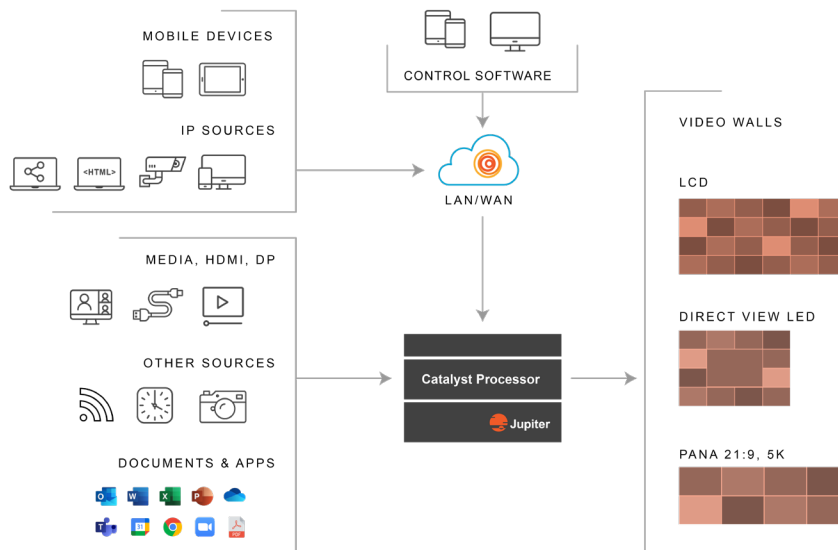

HARDWARE	
CPU	Intel ES Xeon 6 Core 1.9 GHz or 10 Core 2.4GHz or 16 Core 2.9 GHz
RAM	96, 192GB RAM, Supports 6 channels up to 192GB (32GB x 6) Default: 8GB x 6 (48GB)
Hard Drive (SSD)	250 or 500 or 1000 GB SSD
RAID	-
USB 3.0 Type-A	2
USB 2.0 Type-A	2
Audio	-
Network	Dual Intel X722+X557 2x 10/100/1000 MB/s operation Supports Wake on LAN function
PCI Slots	2 Full Height and 1 Half-Height
Form Factor	1RU
Humidity Altitude	10%-90%, non-condensing
Altitude	Up to 10,000 feet (3,048.0 m)
Power Supply	400W PSU Input: 100 - 240V AC Output: +3.3V/14A, +5V/16A, +12V/33A, +5Vsb/3A, -12V/0.3A DC
Operating Temperature	32°F - 104°F (0°C - 40°C)
Storage Temperature	14°F - 150°F (-10°C - 66°C)
Dimensions	1.75" H x 19" W 17.5" D (45mm x 483mm x 432mm)
Weight	10.4 lbs. (4.7 kg)
Shipping Weight	18 lbs. (8.2 kg)
Shipping Dimensions	6" H x 22" W x 24"D (153mm x 559mm x 610mm)
SOFTWARE	
Software OS	Windows 10 LTSC (Enterprise)
Management Software	Canvas
Encryption	SSL/TLS
Client Software	Desktop & Web
Application Support	Yes
API	TCP/RS232
Picture Viewer	Yes
Scrolling Text	Yes
Clock	Yes, multiple time zones
OUTPUTS	
Interface	8x DisplayPort 1.4 or 8x HDMI (full-size)
Max Output Resolution Per GPU	Up to 8x 5120x3200 @60Hz or 8x 4096x2160 @60Hz (HDMI)
Max 4K Outputs	8x at 4K 3840 x 2160 at 60 Hz
Max 5K Outputs	6x at 5K 5120 x 2160 at 60 Hz
Max Windows per display	16
DIRECT INPUT OPTIONS	
4 Channel HDMI Capture Board	4x 4096x2160 @60Hz(4:2:0) / 4096x2160 @30Hz / 3840x2160 @60Hz (4:2:0) / 3840x2160 @30Hz / 2560x1600 @60Hz
2 Channel DP Capture Board	2x 4096x2160 @60Hz / 4096x2160 @30Hz / 3840x2160 @60Hz / 3840x2160 @30Hz / 2560x1600 @60Hz
4 Channel SDI Capture Board	12G-SDI on connectors 2 & 4 3G-SDI, HD-SDI, SD-SDI on all connectors
Hardware Decoding Board	2x: 3840 x 2160 @ 60Hz, 4x: 3840 x 2160 @ 30Hz, 8x: 1920 x 1080 @ 60Hz, 16x: 1920 x 1080 @ 30Hz, 30+ SD Streams
Software Decoding (per system)	1x 3840x2160 @ 60Hz, 3x 3840x2160 @ 30Hz, 6x 1920x1080 @ 60Hz, 12x 1920x1080 @ 30Hz, 30+ SD Streams
Protocols	MPEG2, MPEG4, H.264/H265 (RTSP)
DESK REMOTE INPUTS	
ScreenShare (Desktop Sharing)	2
VNC	Inputs: Up to 16 VNC Streams, Server: Software included Color Depth: Up to 32 bits per pixel
Web	Inputs: Up to 16 web pages Browser: Embedded Chrome** or Internet Explorer
CERTIFICATIONS	
Regulatory Certifications	Planned (cULus, FCC, ICES, TAA, CE, WEEE)



jupiter.com

© 2024 Jupiter. Jupiter is a registered trademark of Jupiter Systems, Inc. Product specifications and designs are subject to change without notice. All brand and products names and logos are registered trademarks of Jupiter Systems, Inc.

DS_CATE_OCT2024