



Access from multiple devices like your PC, laptop, and now mobile




Drag and drop functionality for seamless video configuration



Provides SSL authentication for peace-of-mind security.

## Architecture of a Canvas Installation

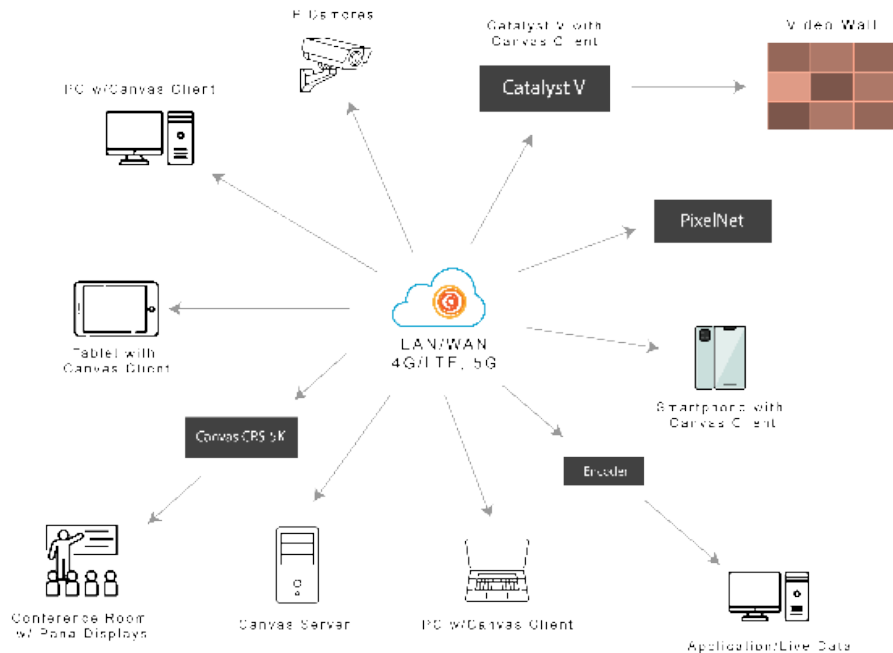

CANVAS SERVER	
Minimum Hardware	CPU: Intel® Core™ i7 HDD: 60GB RAM: 32GB
Recommended Hardware	CPU: Intel Xeon Multi-Core 2.4GHz HDD: 60GB RAM: 32GB
Operating System	Windows 10 64-bit Professional Edition, Windows 10 Enterprise LTSC, or Windows 10 Enterprise LTSC (Optionally, Windows Server 2016 or Windows Server 2019)
CANVAS PC CLIENT	
Minimum Hardware	CPU: Intel® Core™ i5 RAM: 8GB GPU: NVidia NVS 510 or equivalent
Recommended Hardware	CPU: Intel® single or dual Xeon Quad Core 3.3GHz RAM: 16GB GPU: NVidia Quadro 4000 or equivalent
Operating System	Windows 10 64-bit Professional Edition

<b>JUPITER MOBILE MEDIA SERVER</b>	
<b>Minimum Hardware</b>	CPU: Intel® Core™ i9 10900k or Xeon Silver 4210 RAM: 32GB DDR3 HDD: 500GB
<b>Recommended Hardware</b>	CPU: Intel® Xeon Gold 6208U RAM: 32GB DDR3 HDD: 500GB
<b>Operating System</b>	Windows 10 64-bit Professional Edition
<b>CANVAS WALL PROCESSOR: CATALYST XL (LEGACY SUPPORT)</b>	
<b>Supported Boards (Active Support)</b>	4K/5K Quad DP Output Board 3-540-337-00 4K Quad HDMI Output Board 3-540-338-00 Quad Mini-HDMI Video Capture 3-540-304-01 IP Decoder Board 3-540-304-02 Quad Mini-HDMI Video Capture Board 3-540-334-01 Quad BNC SDI Video Capture Board 3-540-312-01 Dual DisplayPort Video Capture Board 3-540-313-01
<b>Supported Boards (Legacy Support)</b>	4K Output Board 3-540-287-00 4K Dual DVI-I Input Board 3-540-284-00 Quad Decoder Board 3-540-248-00 NOTE: 3-540-284-00 and 3-540-248-00 boards certified to work only with 3-540-287-00 output board.
<b>Operating System</b>	Windows 10 Enterprise LTSC, LTSC
<b>CANVAS WALL PROCESSOR: CATALYST V (LEGACY SUPPORT)</b>	
<b>Supported Boards (Active Support)</b>	4K/5K Quad DP Output Board 3-540-337-00 4K Quad HDMI Output Board 3-540-338-00 Quad Mini-HDMI Video Capture 3-540-304-01 IP Decoder Board 3-540-304-02 Quad Mini-HDMI Video Capture Board 3-540-334-01 Quad BNC SDI Video Capture Board 3-540-312-01 Dual DisplayPort Video Capture Board 3-540-313-01
<b>Supported Boards (Legacy Support)</b>	4K Dual DVI-I Input Board 3-540-284-00 4K Output Board 3-540-287-00
<b>Operating System</b>	Windows 10 Enterprise LTSC
<b>CANVAS WALL PROCESSOR: CATALYST 4K (LEGACY SUPPORT)</b>	
<b>Supported Boards (Active Support)</b>	4K Output Board 3-540-287-00, 4K Dual DVI-I Input Board 3-540-284-00 Quad Decoder board 3-540-248-00 NOTE: 3-540-284-00 and 3-540-248-00 boards certified to work only with 3-540-287-00 output board.
<b>Operating System</b>	Windows 10 Enterprise LTSC, LTSC
<b>CANVAS WALL PROCESSOR: C1000 SERIES (LEGACY SUPPORT)</b>	
<b>Supported Boards (Active Support)</b>	4K Output Board 3-540-287-00, 4K Dual DVI-I Input Board 3-540-284-00
<b>Operating System</b>	Windows 10 Enterprise LTSC, LTSC
<b>CANVAS WALL PROCESSOR: CANVAS CRS-4K™ SYSTEM (LEGACY SUPPORT)</b>	
<b>H/W with S/W</b>	Jupiter item number CRS-4K
<b>Operating System</b>	Windows 10 Enterprise LTSC
<b>CANVAS WALL PROCESSOR: CANVAS CRS-5K™ SYSTEM (LEGACY SUPPORT)</b>	
<b>H/W with S/W</b>	Jupiter item number CRS-4K
<b>Operating System</b>	Windows 10 Enterprise LTSC



[jupiter.com](http://jupiter.com)

© 2023 Jupiter. Jupiter is a registered trademark of Jupiter Systems, Inc. Product specifications and designs are subject to change without notice. All brand and products names and logos are registered trademarks of Jupiter Systems, Inc.